

WavePOS 9671




Ready in Windows / Android Systems



Flat Touch Screen



LCM Customer Display

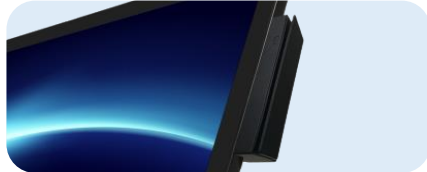

MSR / RFID



Printer

| MODEL | WavePOS 9671 | | | |
|----------------|--|---|---|---|
| CPU | Intel® Celeron® Elkhart Lake J6412 Processor | Intel® Tiger Lake Core™ i3-1115G4 Processor | Intel® Tiger Lake Core™ i5-1135G7 Processor | Quad-core Cortex-A55 RK3568 Processor |
| Memory | 4GB DDR4 1 x SO-DIMM slot up to 16GB | 4GB DDR4 2 x SO-DIMM slot up to 64GB | 4GB DDR4 2 x SO-DIMM slot up to 64GB | 4GB LPDDR4 |
| Storage | 1 x M.2 2242 | 1 x M.2 2242 1 x M.2 2280 (Option) | 1 x M.2 2242 1 x M.2 2280 (Option) | 64GB eMMC 1 x Micro SD slot |
| Power | 120W (24V) | | | |
| Display | 15.6" TFT-LCD | | | |
| Resolution | 1366 x 768 or 1920x1080 (Option) | | | |
| Touch Screen | PCAP Multitouch Screen / 10 Points | | | |
| Brightness | 400 nits | | | |
| Weight | 3.8 kgs | 4.0 kgs | 4.0 kgs | 3.8 kgs |
| Dimensions | 378 x 370 x 250mm (W x H x D) | | | |
| Printer | Paper Width : 58/80 mm, Speed : 300 mm/s, Auto Cutter, ESC/POS | | | |
| Audio | 2 x 2W Speaker | | | |
| OS | Windows 10 IoT | Windows 10 IoT | Windows 10 IoT | Android 11 |
| Certifications | CE, FCC | | | |
| Environment | 0°C ~ 40°C, 20% ~ 80% RH (Operating) -20°C ~ 60°C, 10% ~ 90% RH (Storage) | | | |
| I/O | 3 x COM (RJ45), 1 x 12V/24V C/D (RJ11), 3 x USB 3.0, 1 x USB 2.0, 1 x Giga LAN (RJ45), 1 x Video Port, 1 x 24V DC-IN | 3 x COM (RJ45), 1 x 12V/24V C/D (RJ11), 4 x USB 3.0, 1 x Giga LAN (RJ45), 1 x Video Port, 1 x 24V DC-IN | 3 x COM (RJ45), 1 x 12V/24V C/D (RJ11), 4 x USB 3.0, 1 x Giga LAN (RJ45), 1 x Video Port, 1 x 24V DC-IN | 1 x COM (RJ50), 1 x 12V/24V C/D (RJ11), 1 x USB 3.0, 3 x USB 2.0, 2 x Giga LAN (RJ45), 1 x Micro SD, 1 x Video Port, 1 x 24V DC-IN |
| Option | | | | |
| Peripheral | MSR, RFID, LCM, Printer, 2nd Display | | | |